


Full Survey, Design, Manufacture
and Installation service.

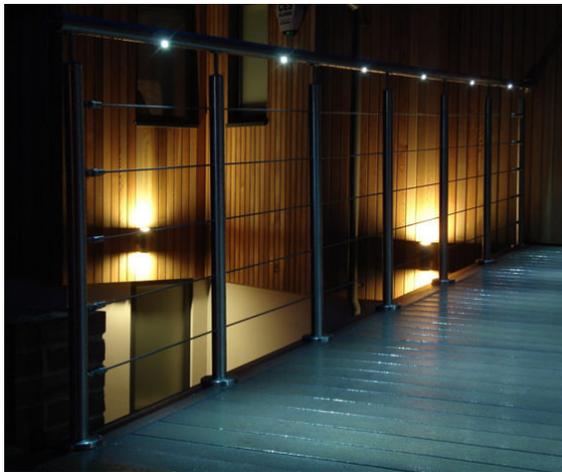

ILLUMINE

Handrail with LED inserts

HANDRAIL: Stainless Steel 42mm or 48mm
dia.

Alternatively, the original “warm to the touch”
handrail 50mm diameter with 4mm (4,000
microns) thick PVC sleeving over galvanised
steel tube.

LIGHTING:

- Individual LED light INSERTS are 316 stainless steel securely fitted into the steel core rail at variable centres between 250 mm and 1,000 mm depending on the lighting level required.
- The installed lumen output of the INSERT is 120 lumens and each unit consumes only 1 watt of power. They have an ingress protection rating of IP67 and an impact rating of IK10
- Dimming and emergency options are available and motion sensors can be used to control the INSERTS AC power requirement is 100v-240v Reference: BS 5266-1 emergency lighting H1 b code of practice.

Benefits of Illumine handrails

- Suitable for both internal and external applications Commercial or domestic use.
- Variable spacing to suit lighting levels required Can be fitted around curved handrail Accurate, direct light positioning Excellent vandal resistance

Unit 14, Woodland Close, Clipstone,
NG21 9BF

Sales: 07840 997322

sales@bespokeprojects.biz

Office: 01623 634589

info@bespokeprojects.biz

DATA SHEET

